

Alloptic MicroNode™ 130 RFoG ONU




The Alloptic **MicroNode 130 Forward and Return Path RFoG ONU** delivers advanced bi-directional, interactive RF services over a passive fiber optic distribution network. The MicroNode 130 RFoG ONU serves as the optical transport layer for RF video, DAVIC, and DOCSIS technologies in deep fiber and FTTH access networks. This not only eliminates the costs of the annual testing and maintenance required to operate the HFC nodes, but also reduces the ongoing power requirements of nodes and RF amplifiers. The MicroNode provides bi-directional services over extended RF frequencies (up to 1.1GHz) while being compatible with both headend and customer premises equipment (CPE), and preserving today's operating processes. Alloptic's MicroNode 130 RFoG ONU: flexibility to grow your network to meet customer demand now and in the future.

Benefits

- Reduces network costs via elimination of HFC nodes and amplifiers
- Allows deployment of deep fiber and FTTH distribution networks while leveraging existing RF and DOCSIS investments
- Compatible with headend and CPE equipment
- High performance, ultra low noise burst mode enables use of full RF spectrum for the return path, resulting in increased available bandwidth
- Increased reliability of an all-fiber network
- Reduced power consumption via green technology

Features

- Extended spectrum RF video
- Analog & digital video formats
- Universal HFC set top box, cable modem and head-end support
- Transparent return path capability (protocol and modulation format agnostic)
- Optical AGC with positive RF up-slope
- Supports in-home applications without amplifiers
- In-home power over coax cabling

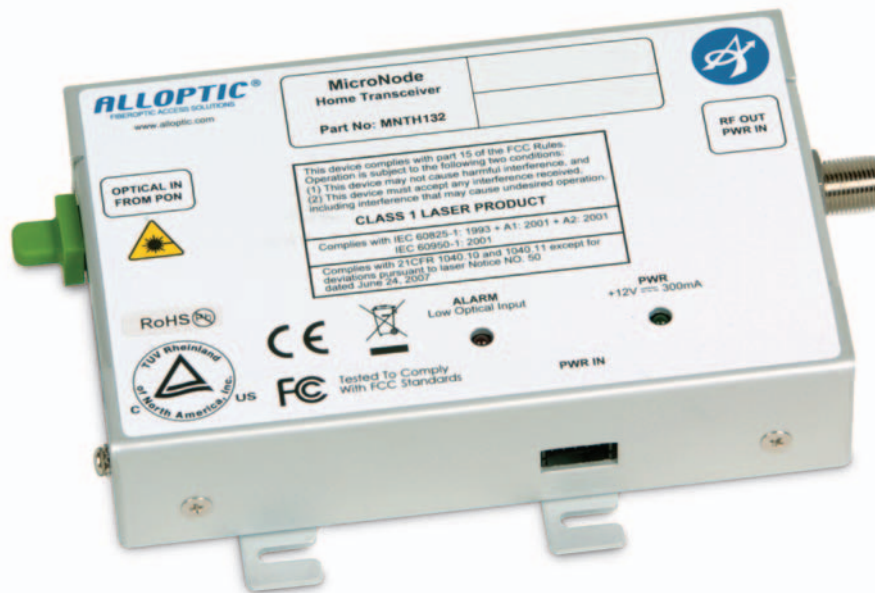

Imagine the Possibilities™

Alloptic MicroNode™ 130 RFoG ONU

Specifications

Physical

- 1.2" H x 3.5" W x 5" D
3.0cm H x 8.9cm W x 12.7cm D
- Weight: 7.5oz / 0.2kg

Indicators/External Alarms

- Green LED power indicator
- Red LED loss of signal indicator

Optical Interface

- 1 recessed SC/APC female fiber connector

Customer Interface

- 75 ohm coax "F" connector

Downstream Characteristics

- Input wavelength: 1310nm ±50nm
- Input power range: 0 to -6dBm
- Loss of optical power alarm: < -11dBm
- RF Output @ 550MHz:
+18dBmV/ch ±2dBmV
- Frequency response:
MNT133: 50MHz to 1.1GHz
MNT132: 88MHz to 1.1GHz
- Up-tilt 50MHz/88MHz to 1.1GHz: 3dB
- CNR @ -6dBm input power: 48
- CSO @ 0dBm input power: 60
- CTB @ 0dBm input power: 60

Return Path Characteristics

- Wavelength: 1550 ±10nm
- Output power: +2 to +4dBm
- Input dynamic range:
+15dBmV to +40dBmV
- Frequency response:
MNT133: 5MHz to 42MHz
MNT132: 5MHz to 65MHz

Flexible Installation

- Operate on a single PON fiber architecture
- Installs into any Alloptic home ONT enclosure
- Temperature-hardened

Power and Environmental

- Operating temperature: -40°C to +65°C
- Humidity: 5% to 95% non-condensing
- Power input voltage: 10 to 16VDC (12VDC nominal)
- Power consumption: 3 watts max
2.3 watts typical

Standards and Certifications

- UL listed, CE mark certified
- Meets or exceeds FCC part 15b
- IEC 608251:1993+A1:1997+A2:2001
- 2004/108/EC
- EN55022, EN55024, EN50083, EN61000-3 & EN60950
- RoHS
- SCTE 55-1, 55-2
- Compatible with DAVIC & DOCSIS

Ordering Information

Part #	Description
MNT132	MicroNode 132 RFoG ONU
MNT133	MicroNode 133 RFoG ONU

Power

The following Alloptic power supplies may be used to operate MicroNode 130 RFoG ONUs.


Part #	Description
PSB8000	APC UPS (Charger & battery) 12 Volt
PSB8002	Hardened APC UPS (charger & battery), 12 volt
PSB1005	Brick, plug-mount, 12 Volt
PSB1006	Brick, International plug mount, 12 Volt
PSB1007	Brick, plug-mount, coax feed, 12 Volt
PSB1008	Brick, International plug mount, barrel plug connector, 12 Volt
PSB1009	Hardened UPS for OSPE202 (120VAC)
PSB1010	Hardened UPS for OSPE202 (240VAC)
BAT1002	UPS battery for OSPE202 and PSB8000 series, 12 Volt

Mounting

The MicroNode 132 RFoG ONUs may be mounted directly on an interior wall or into any of the following Alloptic enclosures.

Part #	Description
OSPE110	Enhanced plastic outside plant enclosure kit
OSPE120	Plastic outside enclosure with NID
OSPE202	All-in-One metal enclosure
OSPE301	MicroNode standard outside enclosure

Standalone RFoG Architecture

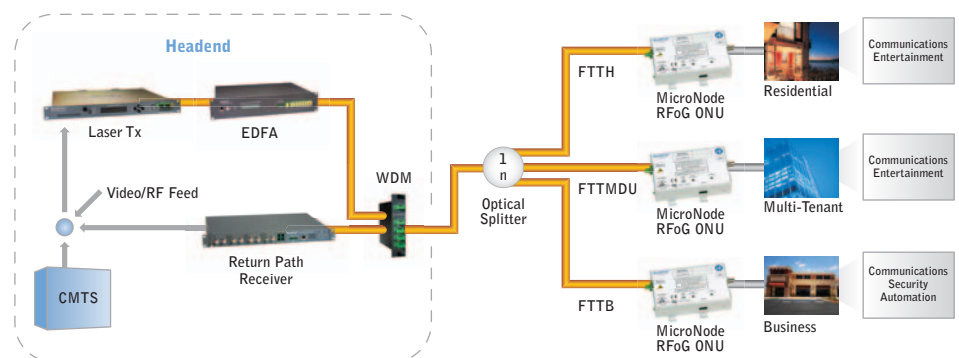

www.alloptic.com

Alloptic, Inc.
2675 Collier Canyon Road
Livermore, CA 94551
925.245.7600